

# SUNNY BROOK PAVERS



## Overview

Versico has partnered with Sunny Brook Pavers to allow building owners, architects, specifiers, and contractors to obtain all the products required for a Plaza Paver system from a single source. In addition to pavers and related accessories, Versico also offers material, overburden removal, and wind speed warranties. Available in a wide variety of sizes, colors, and finishes, Sunny Brook Pavers protect the underlying roofing membrane and add attractive, useable space to any building.

## Features and Benefits

- Minimum 8,500 psi compressive strength; flexural strength of 1,100 pounds per square foot
- Available in various sizes and weights; the most common size is 23½" x 23½" x 2", weighing 24 pounds per square foot
- Available in standard colors, specific color blends, and custom colors
- Sunny Brook Pavers can contribute to LEED® credit requirements
- When used to completely cover a single-ply roof system, Factory Mutual (FM) Very Severe Hail (VSH) rating can be achieved

## Precautions

- Pavers can be heavy. Be sure to use at least two people to move them.


- Do not to stack pavers in an area that might exceed the structural capacity of the building.
- Take care not to damage membrane or flashings during installation.
- Pavers are made using natural materials; therefore, a slight color variance is expected.

### TYPICAL PROPERTIES AND CHARACTERISTICS

Compressive	8,500 psi
Absorption	Less than 5%
Flexural	1,100 lbs. Per sq/ft.

Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product.

## Color Options

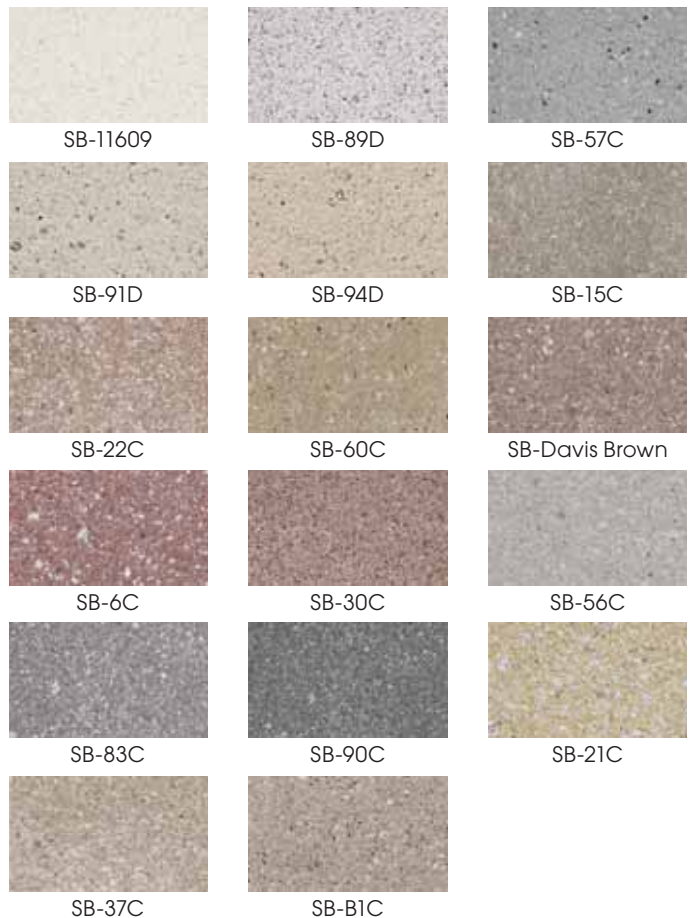

A SINGLE SOURCE FOR SINGLE-PLY ROOFING

**Versico**, PO Box 1289, Carlisle, PA 17013  
 Tel: **800.992.7663** Fax: 717.960.4036 Web: **www.versico.com**