

# PRODUCT REFERENCE GUIDE

# PRODUCT REFERENCE GUIDE

## Table of Contents

EPDM Accessories .....	1
Thermoplastic Accessories .....	3
Fasteners & Plates .....	8
Adhesives & Sealants .....	12
Air & Vapor Barriers .....	18
Insulation .....	19
EPDM Packaging Guide .....	23
EPDM Quick Reference Guide .....	25
TPO Quick Reference Guide .....	27
PVC Quick Reference Guide .....	28

**QUICK-APPLIED SEAM TAPE**


Fully cured synthetic rubber product used for splicing cured EPDM membrane in ballasted, adhered, and mechanically attached roofing systems.

**Sizes Available:**

3" x 100' – Product Number: 301939 – Black  
 3" x 100' – Product Number: 309817 – White  
 6" x 100' – Product Number: 302953 – Black  
 6" x 100' – Product Number: 317501 – White

**Quantity Per Box:**

4 rolls (3"), 2 rolls (6")

**QUICK-APPLIED CURED COVERSTRIP**


Cured EPDM membrane laminated to a synthetic rubber adhesive makes this product the optimal solution to overlay seam fastening plates, strip in seams and metal edgings, or make roof repairs.

**Sizes Available:**

6" x 100' – Product Number: 309774 – Black  
 6" x 100' – Product Number: 309813 – White  
 9" x 100' – Product Number: 309776 – Black  
 9" x 100' – Product Number: 309814 – White  
 12" x 50' – Product Number: 317601 – Black  
 12" x 50' – Product Number: 317599 – White

**Quantity Per Box:**

2 rolls (6"), 1 roll (9" and 12")

**20" QUICK-APPLIED CURED FLASHING**


20" Quick-Applied (QA) Cured Flashing is pre-cut with Quick-Applied Seam Tape and is the most efficient, labor-saving way to flash a curb. Production time on projects with numerous curbs or wall flashings can be reduced with this labor saving accessory.

**Sizes Available:**

20" x 50' – Product Number: 326491 – Black  
 20" x 50' – Product Number: 330913 – White

**Quantity Per Box:** 1 roll


**QUICK-APPLIED CURB FLASHING**


Cured EPDM membrane cut to 20" wide width with 6" QA Tape already applied. This product provides an efficient way to flash curbs and short walls.

**Sizes Available:**

20" x 50' – Product Number: 309775 – Black

**Quantity Per Box:** 1 roll

**QUICK-APPLIED UNCURED EPDM FLASHING**


Uncured EPDM laminated to synthetic rubber adhesive. QA Flashing can be used to flash corners, pipes and other penetrations.

**Sizes Available:**

6" x 100' – Product Number: 302682 – Black  
 6" x 100' – Product Number: 310434 – White  
 9" x 50' – Product Number: 303484 – Black  
 9" x 50' – Product Number: 309950 – White  
 12" x 50' – Product Number: 309773 – Black  
 12" x 50' – Product Number: 309951 – White

**Quantity Per Box:**

2 rolls (6"), 1 roll (9" and 12")

**QUICK-APPLIED RTS**


Reinforced Termination Strip (RTS) combines reinforced EPDM with 3"-wide Quick-Applied tape for additional membrane securement. A 9" version with 3"-wide Quick-Applied tape on both sides permits securement of perimeter sheeting on mechanically attached systems.

**Sizes Available:**

6" x 100' RTS – Product Number: 301944 – Black  
 6" x 100' RTS – Product Number: 309818 – White  
*Use with all EPDM Systems*

9" x 100' RTS – Product Number: 301945

*Use with Mechanically Attached EPDM Systems*

**Quantity Per Box:**

2 rolls (6"), 1 roll (9")

**QUICK-APPLIED OVERLAYMENT STRIP**


Semi-cured EPDM laminated to a synthetic rubber adhesive. It is designed for stripping in drip edges, all types of metal edging and Versico seams, and all fastening plates.

**Sizes Available:**

6" x 100' – Product Number: 332656 – Black

9" x 100' – Product Number: 332657 – Black

12" x 50' – Product Number: 305722 – Black

**Quantity Per Box:** 2 rolls (6"), 1 roll (9"), 1 roll (12")

**QUICK-APPLIED T-JOINT COVERS**


Uncured EPDM laminated to a synthetic rubber adhesive. Used to seal field splice intersections and horizontal-to-vertical transitions of field splices. 12" x 12" T-Joint Covers are available for 30-Year Warranty Systems.

**Sizes Available:**

6" x 6" – Product Number: 304029 – Black

6" x 6" – Product Number: 332871 – White

12" x 12" – Product Number: 305089 – Black

**Quantity Per Box:** 20

**QUICK-APPLIED INSIDE/OUTSIDE CORNERS**


Uncured EPDM laminated to a synthetic rubber adhesive. The pre-cut corners greatly reduce installation time and can be used for inside and outside corner installations.

**Sizes Available:**

7" x 9" – Product Number: 303325 – Black

7" x 9" – Product Number: 310310 – White

**Quantity Per Box:** 20

**QUICK-APPLIED PIPE SEALS**


Cured EPDM with a synthetic rubber adhesive. QA Pipe Seals increase the speed and ease of installation.

**Sizes Available:**

½" – 3" – Product Number: 302684 – Black

1" – 6" – Product Number: 309812 – Black

1" – 6" – Product Number: 317066 – White

**Quantity Per Box:** 10

**QUICK-APPLIED POURABLE SEALER POCKETS**


Uncured EPDM Flashing with a synthetic rubber adhesive and a 2" support strip pre-applied to the flashing. Sizes can be combined to form larger pockets when required.

**Sizes Available:**

4" dia. – Product Number: 303322 – Black

6" dia. – Product Number: 303323 – Black

6" dia. – Product Number: 316243 – White

8" dia. – Product Number: 303324 – Black

8" dia. – Product Number: 332890 – White

**Quantity Per Box:** 12

**QUICK-APPLIED WALKWAY PADS**


Cured EPDM with a synthetic rubber adhesive. Quick-Applied Walkway Pads are designed to protect the Versico EPDM membrane in areas exposed to repetitive foot traffic.

**Sizes Available:**

30" x 30" – Product Number: 300829 – Black

30" x 30" – Product Number: 309589 – White

**Quantity Per Pallet:** 50

**PIPE SUPPORTS**


An extruded EPDM product used to support steel pipe, electrical conduit, PVC pipe, and copper tubing on Versico's EPDM, TPO, and PVC roofing systems.

**Sizes Available:**

Mini: ½" – 1½" – Product Number: 309403

Small: ¾" – 2" – Product Number: 309402

Large: 2½" – 5" – Product Number: 309404

**Quantity Per Box:** 20 (Mini and Small), 10 (Large)

## NON-REINFORCED FLASHING



Non-reinforced thermoplastic membrane used to field-fabricate pipe flashings, and scuppers when the use of a pre-molded accessory is not feasible.

### TPO

#### Sizes Available: 60-mil

12" x 50' – Product Number: 300473 – White  
 12" x 50' – Product Number: 300479 – Gray  
 12" x 50' – Product Number: 300476 – Tan  
 24" x 50' – Product Number: 300474 – White  
 24" x 50' – Product Number: 300480 – Gray  
 24" x 50' – Product Number: 300477 – Tan  
 24" x 50' – Product Number: 332963 – Medium Bronze  
 24" x 50' – Product Number: 328050 – Patina Green  
 24" x 50' – Product Number: 328056 – Rock Brown  
 24" x 50' – Product Number: 328053 – Slate Gray  
 24" x 50' – Product Number: 328047 – Terra Cotta

**Quantity Per Box:** 1 roll

### PVC

#### Sizes Available: 60-mil

12" x 50' – Product Number: 327840 – White/Gray  
 12" x 50' – Product Number: 327842 – White/Tan  
 24" x 50' – Product Number: 327841 – White/Gray  
 24" x 50' – Product Number: 327843 – White/Tan  
 24" x 50' – Product Number: 334437 – Lt Gray/Gray

**Quantity Per Box:** 1 roll

## REINFORCED FLASHING



Pre-slit reinforced membrane used to overlay fasteners, plates, and end laps on VersiFleece and VersiWeld QA membranes.

### TPO

#### Sizes Available: 45-mil

6" x 100' – Product Number: 300485 – White  
 6" x 100' – Product Number: 300486 – Gray  
 6" x 100' – Product Number: 302811 – Tan

#### 60-mil

9" x 50' – Product Number: 310419 – White  
 9" x 50' – Product Number: 310417 – Gray  
 9" x 50' – Product Number: 310418 – Tan

#### 80-mil

9" x 50' – Product Number: 318404 – White

**Quantity Per Box:** 3 rolls (6"), 2 rolls (9")

### PVC / KEE HP

#### Sizes Available:

60-mil

6" x 100' – Product Number 327852 – White/Gray (KEE HP Non-Reinforced)

6" x 100' – Product Number 327853 – White/Tan (KEE HP Non-Reinforced)

**Quantity Per Box:** 2 rolls/carton

## TPO PRESSURE-SENSITIVE RUSS



10" RUSS (shown) is used in place of narrow-width sheets to secure membrane in the perimeter of the roof on mechanically attached systems. 6" RUSS is also available and is used to secure membrane at the base of vertical walls for additional membrane securement without penetrating the sheet.

#### Sizes Available:

6" x 100' – Product Number: 303373

10" x 100' – Product Number: 305442

**Quantity Per Box:** 1 roll (10"), 2 rolls (6")

## TPO PRESSURE-SENSITIVE COVER STRIP



Non-reinforced TPO laminated to pressure-sensitive tape used for stripping in flat metal flanges such as shop-bent drip edge.

#### Sizes Available:

6" x 100' – Product Number: 303102 – White

6" x 100' – Product Number: 303103 – Gray

6" x 100' – Product Number: 303104 – Tan

**Quantity Per Box:** 2 rolls



### YELLOW PS WARNING STRIP

Yellow PS Warning Strip is non-reinforced TPO flashing laminated to a pressure sensitive adhesive and can be applied to EPDM or TPO systems to provide a visual warning of an impending hazard (roof edge, skylight, etc.)

#### Sizes Available:

6" x 100' – Product Number: 325721

**Quantity Per Box:** 2 rolls

## PVC PRESSURE-SENSITIVE COVER STRIP



Non-reinforced KEE HP flashing laminated to a nominal 35-mil, fully cured, pressure-sensitive, synthetic rubber adhesive.

#### Sizes Available:

6" x 100' – Product Number: 332616 – White

6" x 100' – Product Number: 332617 – Gray

6" x 100' – Product Number: 332618 – Tan

**Quantity Per Box:** 2 rolls



## REINFORCED COVER STRIP

Versico's Reinforced Coverstrip is an 8" (20.3 cm)-wide, nominal 80-mil (2.03 mm)-thick flashing that contains a polyester reinforcing fabric. Reinforced Coverstrip is used for stripping in rows of fasteners and plates and covering the butt joints of Versico's VersiFleece, VersiFlex, and VersiFlex KEE HP membranes.



### PVC

#### Sizes Available:

##### 80-mil

8" x 75' – Product Number: 325168 – White

8" x 75' – Product Number: 325169 – Gray

8" x 75' – Product Number: 326121 – Tan

**Quantity Per Box:** 1 roll



### KEE HP

#### Sizes Available:

##### 60-mil

8" x 100' – Product Number: 325981 – White

**Quantity Per Box:** 2 rolls

##### 80-mil

8" x 75' – Product Number: 325165 – White

8" x 75' – Product Number: 325167 – Gray

8" x 75' – Product Number: 326120 – Tan

**Quantity Per Box:** 1 roll

## PVC YELLOW SAFETY WARNING STRIP



Reinforced PVC Yellow Warning Strip can be used on PVC to indicate roof edges or other hazards.

#### Sizes Available:

6" x 150' – Product Number: 326180

**Quantity Per Box:** 2 rolls

## SPLIT PIPE SEALS



Prefabricated flashings made of VersiWeld detail membrane and VersiFlex membrane used for flashing pipes with an obstruction that prevents the use of a molded pipe seal. Additional sizes and colors available through special order.

## SQUARE TUBING WRAPS



Fabricated using VersiWeld detail membrane and VersiFlex membrane and designed to flash square metal tubing. A split and overlap tab are incorporated into these parts to allow the flashings to be opened and wrapped around a square penetration with an obstruction. Additional sizes and colors available through special order.

### TPO

#### Sizes Available:

3" x 3" – Product Number: 305576 – White

3" x 3" – Product Number: 307664 – Gray

3" x 3" – Product Number: 307660 – Tan

4" x 4" – Product Number: 305577 – White

4" x 4" – Product Number: 307665 – Gray

4" x 4" – Product Number: 307661 – Tan

5" x 5" – Product Number: 305578 – White

5" x 5" – Product Number: 307666 – Gray

5" x 5" – Product Number: 307662 – Tan

6" x 6" – Product Number: 305579 – White

6" x 6" – Product Number: 307667 – Gray

6" x 6" – Product Number: 307663 – Tan

**Quantity Per Box:** 8

### PVC

#### Sizes Available:

3" x 3" – Product Number: 307742 – White

3" x 3" – Product Number: 307743 – Gray

3" x 3" – Product Number: 307744 – Tan

4" x 4" – Product Number: 307745 – White

4" x 4" – Product Number: 307746 – Gray

4" x 4" – Product Number: 307747 – Tan

6" x 6" – Product Number: 307748 – White

6" x 6" – Product Number: 307749 – Gray

6" x 6" – Product Number: 307750 – Tan

**Quantity Per Box:** 8

### TPO

#### Sizes Available:

1" – Product Number: 303504 – White

1" – Product Number: 307654 – Gray

1" – Product Number: 307648 – Tan

2" – Product Number: 303505 – White

2" – Product Number: 307655 – Gray

2" – Product Number: 307649 – Tan

3" – Product Number: 303506 – White

3" – Product Number: 307656 – Gray

3" – Product Number: 307650 – Tan

4" – Product Number: 303507 – White

4" – Product Number: 307657 – Gray

4" – Product Number: 307651 – Tan

5" – Product Number: 303508 – White

5" – Product Number: 307658 – Gray

5" – Product Number: 307652 – Tan

6" – Product Number: 303509 – White

6" – Product Number: 307659 – Gray

6" – Product Number: 307653 – Tan

**Quantity Per Box:** 8

### PVC

#### Sizes Available:

1" – Product Number: 307724 – White

1" – Product Number: 307725 – Gray

1" – Product Number: 307726 – Tan

2" – Product Number: 307727 – White

2" – Product Number: 307728 – Gray

2" – Product Number: 307729 – Tan

3" – Product Number: 307730 – White

3" – Product Number: 307731 – Gray

3" – Product Number: 307732 – Tan

4" – Product Number: 307733 – White

4" – Product Number: 307734 – Gray

4" – Product Number: 307735 – Tan

5" – Product Number: 307736 – White

5" – Product Number: 307737 – Gray

5" – Product Number: 307738 – Tan

6" – Product Number: 307739 – White

6" – Product Number: 307740 – Gray

6" – Product Number: 307741 – Tan

**Quantity Per Box:** 8

## MOLDED PIPE SEALS



Injection-molded, pre-formed pipe flashings for pipes ¾" to 8" diameter. Molded Pipe Seals provide a reliable method of waterproofing round pipe penetrations, as well as a substantial labor savings compared to field fabrication.

### TPO

#### Sizes Available:

¾"– 8" dia. – Product Number: 316534 – White

¾"– 8" dia. – Product Number: 316535 – Gray

¾"– 8" dia. – Product Number: 316536 – Tan

**Quantity Per Box: 8**

### PVC

#### Sizes Available:

¾"– 8" dia. – Product Number: 316537 – White

¾"– 8" dia. – Product Number: 322959 – Gray

¾"– 8" dia. – Product Number: 323823 – Tan

**Quantity Per Box: 8**

## CURB WRAP CORNERS



Fabricated flashings made of VersiWeld detail membrane and VersiFlex membrane designed to reduce curb flashing time. Each corner has a 6"-wide base flange and a 12" overall height. One curb will require 4 corners. Other sizes and colors available through special orders. Can also be ordered in 1- or 2-piece wraps.

### TPO

#### Sizes Available:

7" Wrap for 12" Curb –

Product Number: 305062 – White

13" Wrap for 24" Curb –

Product Number: 305063 – White

19" Wrap for 36" Curb –

Product Number: 305064 – White

**Quantity Per Box:** 12 pieces or  
3 complete curbs

### PVC

#### Sizes Available:

7" Wrap for 12" Curb –

Product Number: 322973 – White

Product Number: 322970 – Gray

Product Number: 322977 – Tan

13" Wrap for 24" Curb –

Product Number: 322975 – White

Product Number: 322971 – Gray

Product Number: 322978 – Tan

19" Wrap for 36" Curb –

Product Number: 322976 – White

Product Number: 322972 – Gray

Product Number: 322979 – Tan

**Quantity Per Box:** 12 pieces or  
3 complete curbs

## MOLDED SEALANT POCKETS



Interlocking, two-piece, injection-molded and weldable pockets used to waterproof pipe clusters or other oddly shaped penetrations.

### TPO

#### Sizes Available:

6" wide x 2" high

Can be adjusted from 7½" to 11½" in length

Product Number: 316539 – White

Product Number: 316540 – Gray

Product Number: 316541 – Tan

**Quantity Per Box:** 5 complete pockets

### PVC

#### Sizes Available:

6" wide x 2" high

Can be adjusted from 7½" to 11½" in length

Product Number: 316542 – White

**Quantity Per Box:** 5 complete pockets

## RIB PROFILE



This profile is extruded from the same weather-resistant TPO or PVC compound as the membrane. The Rib Profile is secured to the TPO or PVC roofing membrane to simulate a standing seam metal roofing system. The physical dimensional stability of the profile is enhanced with fiberglass and the rectangular profile provides exceptional shadow lines for aesthetic appeal.

### TPO

#### Sizes Available:

10' – Product Number: 324574 – White

10' – Product Number: 324572 – Gray

10' – Product Number: 324573 – Tan

10' – Product Number: 333064 – Medium Bronze

10' – Product Number: 330830 – Rock Brown

10' – Product Number: 330797 – Terra Cotta

10' – Product Number: 330799 – Slate Gray

10' – Product Number: 330798 – Patina Green

**Quantity Per Box:** 20

### PVC

#### Sizes Available:

10' – Product Number: 321909 – White

10' – Product Number: 321911 – Gray

10' – Product Number: 321910 – Tan

10' – Product Number: 334439 – Lt Gray

**Quantity Per Box:** 20



## INSIDE/OUTSIDE CORNERS



Pre-molded and used for flashing inside and outside corners on a variety of details.

### TPO

#### Sizes Available: One Size

Product Number: 300020 – Gray – Outside  
Product Number: 300025 – Tan – Outside  
Product Number: 300016 – White – Outside  
Product Number: 307406 – White – Inside  
Product Number: 307407 – Tan – Inside  
Product Number: 307408 – Gray – Inside

**Quantity Per Bag:** 12

### PVC

#### Sizes Available: One Size

Product Number: 329286 – White/Gray – Outside  
Product Number: 329284 – White/Gray – Inside  
Product Number: 329287 – White/Tan – Outside  
Product Number: 329285 – White/Tan – Inside

**Quantity Per Bag:** 12

## T-JOINT COVERS



Injection-molded non-reinforced flashings used to seal T-Joint splice intersections.

### TPO

#### Sizes Available:

4½" dia. – Product Number: 307476 – White  
4½" dia. – Product Number: 307478 – Gray  
4½" dia. – Product Number: 307477 – Tan

**Quantity Per Box:** 100

### PVC

#### Sizes Available:

4½" dia. – Product Number: 308224 – White  
4½" dia. – Product Number: 309494 – Gray  
4½" dia. – Product Number: 309847 – Tan

**Quantity Per Box:** 100

## UNIVERSAL CORNERS



Pre-molded corners, used for flashing outside or inside corners on new construction installations where right-angled conditions are more common. Installation is fast and easy with no stretching required.

### TPO

#### Sizes Available: One Size

Product Number: 318070 – White  
Product Number: 327601 – Gray  
Product Number: 327602 – Tan

**Quantity Per Box:** 20


### PVC

#### Sizes Available: One Size

Product Number: 318071 – White  
Product Number: 329288 – Gray

**Quantity Per Box:** 20

## WALKWAY ROLLS




Heat-weldable walkway rolls designed to protect Versico's TPO and PVC membranes in areas exposed to repetitive foot traffic and other hazards.

### TPO WALKWAY ROLLS

#### Sizes Available:

34" x 50' – Product Number: 310508 – White  
34" x 50' – Product Number: 310509 – Gray  
34" x 50' – Product Number: 310510 – Tan

**Packaged Individually**



### PVC WALKWAY ROLLS

#### Sizes Available:

36" x 60' – Product Number: 307711 – Gray

**Packaged Individually**

## CROSSGRIP WALKWAY

PVC and TPO Crossgrip Walkway is an open grid walkway used to protect the membranes from regular foot traffic and other hazards.



**TPO**  
**Sizes Available:**  
 3' x 33' – Product Number: 332633 – White  
 3' x 33' – Product Number: 332634 – Gray  
**Packaged Individually**



**PVC**  
**Sizes Available:**  
 3' x 33' – Product Number: 332475 – White  
 3' x 33' – Product Number: 332474 – Gray  
**Packaged Individually**

## COATED METAL



24-gauge (0.6 mm) galvanized steel sheet that is coated with a layer of .035" non-reinforced flashing. Membrane may be welded directly to the coated metal. The sheet is cut to the appropriate width and used to fabricate metal drip edges or other roof perimeter edging profiles.

**TPO**  
**Sizes Available:**  
 5 Pcs/Pallet –  
 4' x 10' – Product Number: 332912 – Patina Green  
 4' x 10' – Product Number: 332913 – Rock Brown  
 4' x 10' – Product Number: 332914 – Slate Gray  
 4' x 10' – Product Number: 332915 – Terra Cotta  
 4' x 10' – Product Number: 332916 – Medium Bronze

10 Pcs/Pallet –  
 4' x 10' – Product Number: 309272 – White  
 4' x 10' – Product Number: 309273 – Gray  
 4' x 10' – Product Number: 309274 – Tan

25 Pcs/Pallet –  
 4' x 10' – Product Number: 303181 – White  
 4' x 10' – Product Number: 303183 – Gray  
 4' x 10' – Product Number: 303182 – Tan

**PVC**  
**Sizes Available:**  
 10 Pcs/Pallet –  
 4' x 10' – Product Number: 307708 – White  
 4' x 10' – Product Number: 307709 – Gray  
 4' x 10' – Product Number: 307710 – Tan  
 4' x 10' – Product Number: 334438 – Lt. Gray

## Fasteners & Plates

### HPV FASTENER



Applicable to steel, 22-gauge and heavier, CDX plywood and wood plank deck types. Can be used to secure VersiGard reinforced membranes, RTS and for insulation securement. Longer fastener sizes available as special order. Not applicable for securing TPO and PVC membranes.

**Sizes Available:**  
1 ¼", 2"– 15"  
(1" Increments)

**Size & Quantity Per Box:**  
1 ¼", 2"– 6": 1,000; 7"– 12": 500;  
13"– 15": 250; 1 ¼": 1000

### RETRODRILLER



A specially designed fastener with a ½" drill point used for attaching VersiGard, VersiWeld and VersiFlex membranes to structural steel purlins (up to ¾") in standing seam metal roof retrofit applications.

**Sizes Available:**  
4", 5", 6", 8" & 10"

**Size & Quantity Per Box:**  
500

### MP 14-10



A #14 diameter fastener used for VersiGard reinforced, VersiWeld and VersiFlex membrane securement into structural concrete decks (minimum 3,000psi). Also applicable to insulation securement into steel, wood and concrete decks.

**Sizes Available:**  
1 ¼", 1 ¾", 2"– 14"  
(1" Increments)

**Size & Quantity Per Box:**  
1 ¼"– 4": 1,000; 5"– 11": 500; 12"– 14": 250

### INSULTITE




Applicable for insulation attachment in both mechanically fastened and fully adhered applications.

**Sizes Available:**  
2"– 8" (1" Increments)  
1 ⅝", 2", 3"– 8" (1" Increments)

**Size & Quantity Per Box:**  
2"– 8": 1,000

### HPVX FASTENER & HPV-XL FASTENER



A #15 diameter fastener applicable to steel, wood and CDX plywood. Can be used to secure VersiGard, VersiWeld and VersiFlex membranes.

**Sizes Available:**  
2"– 12" (1" Increments)  
14"– 16" (2" Increments)

**Size & Quantity Per Box:**  
2"– 4": 1,000; 5"– 12": 500; 14"– 16": 250

#### HPV-XL FASTENER


*Also Available (Not shown)*

A #21 diameter fastener applicable to steel, wood and CDX plywood decks.

**Sizes Available:**  
2"– 8" (1" increments)

**Size & Quantity Per Box:**  
500 (2" – 6"), 250 (7" – 8")

### CD-10



Applicable for concrete decks. Used to secure VersiGard, VersiWeld and VersiFlex membranes and for insulation securement.

**Sizes Available:**  
2"– 5 ½" (½" Increments)  
6"– 12" (1" Increments)

**Size & Quantity Per Box:**  
2"– 8": 500; 9"– 12": 250

## Fasteners & Plates

### PURLIN FASTENER



Used with Versico's Metal Retrofit Roofing System to secure membrane and RTS to structural steel purlins. Compatible with 2" Polymer Plates. Provides superior back-out resistance in standard 16-gauge Purlins.

**Sizes Available:**  
3¾", 4¾", 5¾", 7", 8"

**Quantity Per Box:**  
1,000



### GYPTEC FASTENER & PLATE



Applicable to cementitious wood fiber, lightweight concrete and gypsum decks. Can be used to secure VersiGard reinforced, VersiWeld and VersiFlex membranes and insulation.

**Sizes Available:**  
2½"– 10" (½" Increments)

**Size & Quantity Per Box:**  
2½"– 7": 500;  
7½"– 10": 250

#### GYPTEC PLATE

**Sizes Available:**  
2" Metal membrane plate  
3" Metal insulation plate

**Quantity Per Box:**  
1,000

### INSULTITE ASAP WITH POLYMER PLATE



A pre-assembled #12 diameter fastener and plastic insulation plate applicable to steel and wood decks. Used to secure insulation only. Longer fastener sizes available as special order.

**Sizes Available:**  
2¼", 3"– 8" (1" Increments)

**Size & Quantity Per Box:**  
2¼"– 8": 250



### POLYMER SEAM PLATE



Used in conjunction with HPV Fasteners. Required for EPDM membrane and RTS attachment for mechanically attached roofing systems over steel decks.

**Sizes Available:**  
2" dia.

**Quantity Per Box:** 1,000

#### HPV-XL POLYMER SEAM PLATE

*Also Available (Not shown)*

For use with HPV-XL Fastener to secure VersiGard reinforced membrane to steel decks.

**Sizes Available:**  
2¾" dia.

**Quantity Per Box:** 1,000

### HPVX ASAP



A pre-assembled HPVX Fastener and HPVX Plate applicable to steel, wood and CDX plywood decks. Used to secure VersiWeld and VersiFlex membranes.

**Sizes Available:**  
2"– 8" (1" Increments)  
10"– 14" (2" Increments)

**Size & Quantity Per Box:**  
2"– 8": 250; 10"– 12": 200; 14": 150



## Fasteners & Plates

### HPV ASAP



Pre-assembled HPV Fastener and Polymer seam plate applicable to steel, wood and CDX plywood decks. Used to secure VersiGard reinforced membranes.

**Sizes Available:**  
2"– 12" (1" Increments)

**Size & Quantity Per Box:**  
2": 500; 3": 450;  
4", 5": 400; 6": 350;  
7", 8": 300; 9": 250;  
10"– 12": 200



### INSULATION FASTENING PLATE



Applicable with Insultite, HPV and CD-10 fasteners. Used for insulation securement only on steel, wood and concrete decks. Available in steel or plastic.

**Sizes Available:**  
3" dia.

**Quantity Per Box:**  
1,000

### INDUCTION WELDING PLATE



3"-round, specially coated plates used with HPVX Fasteners and the RhinoBond induction welding system. Available in TPO and PVC versions.

**Sizes Available:**  
3" dia.

Product Number: 317316 – TPO  
Product Number: 318519 – PVC  
Product Number: 325910 – TPO isoweld®  
Product Number: 329461 – PVC isoweld

**Quantity Per Box:**  
500



### OVAL BARBED PLATE



Use with all VersiFlex PVC polyester-reinforced membranes. These plates are designed to mechanically attach VersiFlex PVC membrane to metal, wood and concrete decks.

**Sizes Available:**  
1 ½" X 2 ¾"

**Quantity Per Box:**  
500

### ACCUTRAC PLATE (INSULATION)



AccuTrac Plates are 3" square flat- or recessed-bottom plates made of Galvalume-coated steel. Used to fasten insulation with the AccuTrac Tool.

**Sizes Available:**  
3"

**Quantity Per Box:**  
1,000



### SEAM FASTENING PLATE



A 2" diameter metal plate, applicable with HPV, MP 14-10 and CD-10 fasteners, used for insulation attachment on MF Systems or membrane securement at angle changes on Adhered Systems in conjunction with the appropriate Versico fastener.

**Sizes Available:**  
2" dia.

**Quantity Per Box:**  
1,000



### SECURFAST™ INSULATION FASTENING PLATE



Designed for SECUROCK® securement under VersiGard, VersiWeld, or VersiFlex roofing systems. Plates are stamped from Galvalume-coated steel for long-term protection against corrosion.

**Sizes Available:**  
2<sup>7</sup>/<sub>8</sub>"

**Quantity Per Box:**  
1,000

### TERM BAR NAIL-IN



Used with Versico's Termination Bar or Seam Fastening Plates to secure membrane to concrete block, brick, or structural concrete walls. A zinc-plated steel pin provides excellent corrosion resistance while the zinc alloy body provides excellent holding power.

**Sizes Available:**  
1<sup>1</sup>/<sub>4</sub>"

**Quantity Per Box:**  
1,000

### HPVX PLATE



Along with the appropriate fastener, used to secure VersiWeld and VersiFlex membranes to steel, concrete and wood decks.

**Sizes Available:** 2<sup>3</sup>/<sub>8</sub>" dia.

**Quantity Per Box:** 1,000

#### HPV-XL PLATE

*Also Available (Not shown)*

For use with HPV-XL Fastener to secure VersiWeld and VersiFlex membranes to steel and wood decks.

**Sizes Available:** 2<sup>3</sup>/<sub>8</sub>" dia.

**Quantity Per Box:** 1,000

### METAL FASTENING BAR



Galvalume™-coated metal bar used to mechanically attach EPDM membranes. The bar can be easily cut to desired length. Installed using HPV Fasteners.

**Sizes Available:**  
1" wide x 10' long

**Quantity Per Box:**  
50 pcs; 500 Linear Feet

### TERMINATION BAR (ALUMINUM)



Extruded aluminum bar that is designed for securing and sealing compression type flashing terminations. The bar features a top edge for ease of applying Versico's Lap Sealant for EPDM installations or Universal Single Ply Sealant for TPO and PVC installations. The bar can be easily cut to any desired length.

**Sizes Available:**  
1" wide x 10' long

**Quantity Per Box:**  
50 pcs; 500 Linear Feet

### G200SA SUBSTRATE ADHESIVE



A high-strength, solvent-based contact adhesive that allows quick bonding of cured EPDM membranes to various substrates. Designed for bonding VersiGard (black and white) non-reinforced, VersiGard reinforced, and Epichlorohydrin membranes to approved substrate.

**Coverage Rate:** 60 square feet per gallon of finished surface.

**Packaging:** 5-gal pail

**Product Number:** 302141

**Shelf Life:** 12 months



### VERSIWELD TPO BONDING ADHESIVE



A high-strength, solvent-based contact adhesive that allows bonding of VersiWeld membrane to various porous and non-porous substrates.

**Coverage Rate:** 60 square feet per gallon of finished surface.

**Packaging:** 5-gal pail

**Product Number:** 302323

**Shelf Life:** 12 months



### EPDM x-23 LOW-VOC BONDING ADHESIVE\*



A high-strength, solvent-based contact adhesive that bonds EPDM membranes to various porous and non-porous substrates. This product meets the <250 gpl VOC content requirements of the OTC Model Rule for Single-Ply Roofing Adhesives.

**Coverage Rate:** 60 square feet per gallon of finished surface.

**Packaging:** 5-gal pail

**Product Number:** 324002

**Shelf Life:** 12 months



### LOW-VOC PVC BONDING ADHESIVE



A high-strength, solvent-based contact adhesive that allows bonding of PVC and KEE HP membrane to various porous and non-porous substrates. Meets the <250 gpl VOC content requirements of the OTC Model Rule for Single-Ply roofing adhesives.

**Coverage Rate:** 60 square feet per gallon finished surface.

**Packaging:** 5-gal pail

**Product Number:** 309126

**Shelf Life:** 12 months



### LOW-VOC BONDING ADHESIVE & LOW-VOC BONDING ADHESIVE 1168



A high-strength, solvent-based contact adhesive that allows bonding of all EPDM and TPO membrane to various porous and non-porous substrates. Low-VOC Bonding Adhesive meets the <250 gpl VOC content requirements of the OTC Model Rule for Single-Ply Roofing Adhesives. Low-VOC Bonding Adhesive 1168 meets the requirements for SCAQMD regulations.

**Coverage Rate:** 60 square feet per gallon of finished surface.

**Packaging:** 5-gal pail

**Product Number:** 303090, 318847

**Shelf Life:** 12 months



### LOW-VOC PVC STEP 1 ACTIVATOR



A high-strength, solvent-basted activator that allows PVC Pressure-Sensitive Cover Strip to be bonded to PVC or KEE HP membranes. Meets the <250 gpl VOC content requirements of the OTC Model Rule.

**Coverage Rate:** As high as 250—300 square feet per gallon.

**Packaging:** (2) 1-gallon cans

**Product Number:** 332651

**Shelf Life:** 12 months



\* Not Compliant in all CA counties

### LOW-VOC PVC STEP 2 PRIMER



A high-solids-content, clear Polymer-based primer used to prepare KEE HP and PVC membrane to be bonded to PVC Pressure Sensitive Cover Strip. Meets the <250 gpl VOC content requirements of the OTC Model Rule.

**Coverage Rate:** As high as 700 square feet per gallon.

**Packaging:** (2) 1-gallon cans

**Product Number:** 332652

**Shelf Life:** 6 months



### PVC STEP 2 PRIMER



A high-solids-content, clear Polymer-based primer used to prepare KEE HP and PVC membrane to be bonded to PVC Pressure Sensitive Cover Strip.

**Coverage Rate:** As high as 200–250 square feet per gallon.

**Packaging:** (2) 1-gallon cans

**Product Number:** 332653

**Shelf Life:** 12 months



### LOW-VOC HYDROBOND™ ADHESIVE



A water-based, wet lay-in, one-sided dispersion adhesive that is used to secure VersiFlex PVC and VersiFleece® PVC membranes to a variety of substrates. Complies with the California Clean Air Act of 1988 (updated in 1997) and California Air Quality Control District's listing of VOC limitations. Meets the requirements of the OTC Model Rule for Single-Ply Roofing Adhesives. Cannot be used with KEE HP, TPO or EPDM smooth-backed membrane.

**Coverage Rate:**

**Smooth-backed membrane:**

Roller application – 100 square feet per gallon of finished surface.

Spray application – 133 square feet per gallon of finished surface.

**VersiFleece membrane:**

Roller application – 100 square feet per gallon over polyiso, DensDeck, DensDeck Prime, SECUROCK, and plywood. Spray application – 100 square feet per gallon over DensDeck and 133 square feet per gallon over polyiso, DensDeck Prime/SECUROCK, and plywood.

**Packaging:** 5-gal pail

**Product Number:** 322112

**Shelf Life:** 12 months



### AQUA BASE 120 BONDING ADHESIVE



A semi-pressure-sensitive water-based adhesive. This product may be used as a two-sided contact adhesive with EPDM and TPO membranes.

**Coverage Rate:** 120 square feet per gallon finished surface. (May vary due to conditions such as insulation type or wall construction.)

**Packaging:** 5-gal pail

**Product Number:** 307431

**Shelf Life:** 12 months



### COLD-APPLIED ADHESIVE



An asphalt-modified polyether, one-sided, wet lay-in adhesive designed to adhere to VersiFleece AC membranes and Versico's modified base sheet.

**Coverage Rate:** 67 square feet per gallon for finished or smooth surfaces. 50 square feet per gallon of finished surface for uneven surfaces.

**Packaging:** 5-gal pail

**Product Number:** 319689

**Shelf Life:** 9 months when stored below 90°F



### SOLVENT-FREE EPDM BONDING ADHESIVE



A high-strength, low-odor, polymer-based adhesive that allows fast installation of EPDM membranes and cured flashings to various substrates. This adhesive is specially designed for installing VersiGard (black and white) reinforced and non-reinforced EPDM membranes.

**Coverage Rate:** 100 square feet per gallon.

**Packaging:** 5-gal pail

**Product Number:** 318127

**Shelf Life:** 6 months



### CAV-GRIP® 3V LOW-VOC ADHESIVE/PRIMER



CAV-GRIP 3V Low-VOC Aerosol Contact Adhesive/Primer can be used for adhering all VersiFleece membranes, standard VersiWeld TPO, and standard VersiGard EPDM to vertical walls, in addition to adhering standard TPO and EPDM membranes to horizontal surfaces. CAV-GRIP 3V can also be used to enhance the bond between Versico's VapAir Seal 725TR and various substrates and priming unexposed asphalt prior to applying Flexible DASH Adhesive for insulation attachment.

**Coverage Rate:** See TDB.

**Packaging:** 40 or 85# aerosol cylinder  
 40# Aerosol Cylinder – Product Number: 330420  
 85# Aerosol Cylinder – Product Number: 332800

**Shelf Life:** 12 months unopened container



### LOW-VOC UN-TACK ADHESIVE REMOVER AND CLEANER



Designed for use with TPO and EPDM membranes, Low-VOC UN-TACK Cleaner is used to remove adhesives and primers from a variety of surfaces including single-ply membranes, accessories, metal, plastic, rubber, and glass.

**Coverage Rate:** 250 – 300 FT<sup>2</sup>/Cylinder surface area to be cleaned

**Packaging:** 85# Aerosol Cylinder

**Product Number:** 332800



### FLEXIBLE DASH ADHESIVE



A low-rise, two-component, VOC-free, energy-absorbing, impact-resistant adhesive used to adhere Versico's VersiFleece membranes and insulation boards to various substrates for a totally non-penetrating system application. Flexible DASH adhesive provides a wider window of temperature workability (25°F - 120°F).



**Coverage Rate:** See Technical Data Bulletin.

**Packaging:**

50-gallon drums – Part A – Product Number: 310472  
 50-gallon drums – Part B – Product Number: 310473  
 15-gallon drums – Part A – Product Number: 317329  
 15-gallon drums – Part B – Product Number: 317331  
 5-Gallon Jug – Part A – Product Number: 329526  
 5-Gallon Jug – Part B – Product Number: 329527  
 Dual Tank – Part A – Product Number: 328043  
 Dual Tank – Part B – Product Number: 328044  
 Dual Cartridge – Product Number: 326735

**Shelf Life:** 12 months (Part A and Part B)

**Flexible DASH Accessories:**

5-Gallon Jug – Static Mixing Tip  
 (Patriot Jr., HULK, PaceCart) – Product Number: 331294

Dual Tank Nozzle Ext. Tubes 14" – Product Number: 330881  
 Dual Tank Nozzle Tips – Product Number: 326081  
 Dual Tank Gun Hoses 25' – Product Number: 326080



# VERSICO

## Adhesives & Sealants



### V-150 EPDM PRIMER



A solvent-based product designed for cleaning and priming EPDM membranes prior to the application of QA products.

**Coverage Rate:** As high as 450 square feet per gallon with clean EPDM membrane. Approx. 250 square feet per gallon with standard membrane.

**Packaging:** (6) 1-gallon cans

**Product Number:** 302081

**Packaging:** 3-gallon pails

**Product Number:** 332684

**Shelf Life:** 12 months



### LOW-VOC PRIMER



Designed for one-step priming of EPDM and TPO surfaces prior to the application of pressure-sensitive products. It is a Low-VOC product that is ideal for use where environmental issues are a concern.

**Coverage Rate:** As high as 700 square feet per gallon with TPO or Clean (No Dust) EPDM membrane. Approx. 250 square feet per gallon with dusted EPDM membrane.

**Packaging:** (6) 1-gal cans

**Product Number:** 329161

**3-gallon pails – Product Number:** 332715

**Shelf Life:** 12 months



### TPO PRIMER



A high-solids, clear polymer-based primer used to prepare TPO membrane prior to the application of TPO pressure-sensitive products.

**Coverage Rate:** 200 – 250 square feet (one surface) per gallon.

**Packaging:** (6) 1-gal cans

**Product Number:** 310471

**Shelf Life:** 12 months unopened can



### PVC AND KEE HP MEMBRANE CLEANER



This cleaner is specially formulated to clean both new and in-service VersiFlex PVC and VersiFlex KEE HP membranes.

**Packaging:** 5-gal closed-top pail

**Product Number:** 329729



### WEATHERED MEMBRANE CLEANER



Used to clean both new and in-service VersiGuard EPDM membrane and VersiWeld TPO membrane prior to the welding process. It helps to loosen and remove dirt and other contaminants from the surface of the membranes and leaves a suitable surface for application of adhesive or primer. Please refer to the Technical Data Bulletins for specific instructions for EPDM and TPO applications. Membrane cleaner is clear in color.

**Coverage Rate:** 400 square feet (one surface) per gallon.

**Packaging:**

(2) 1-gal closed-top cans, 5-gal closed-top pail

1-gal cans

**Product Number:** 304066

5-gal pail

**Product Number:** 302074



### CCW-702 AND CCW-702LV PRIMERS



Solvent-based, high-tack adhesives specifically designed to promote maximum adhesion of Versico 725TR Air and Vapor Barrier to approved substrates. They are also used as a surface prep to promote adhesion with DASH Adhesive.

**Coverage Rate:** 300-350 square feet per gallon.

**Packaging:** 5-gal pails

**CCW-702**

**Product Number:** 305363

**CCW-702LV**

**Product Number:** 316148

**Shelf Life:** 12 months unopened pail



\* CCW-702LV only – not Compliant in all CA counties

\* Not Compliant in all CA counties

## Adhesives & Sealants

### X-TENDA COAT™ TPO PRIMER



A low-VOC, solvent-based primer that is designed to promote optimal adhesion of X-Tenda Coat Acrylic Coating and other acrylic topcoats to new or aged TPO (new TPO that has been weathered for less than 12 months).

**Coverage Rate:** 200–400 square feet per gallon, using a roller or a brush, to a properly prepared surface.

**Packaging:** 5-gallon pail

**Product Number:** 334850

**Shelf Life:** 12 months



### G300 BLACK & WHITE LAP SEALANTS



The consistency enables it to expand and contract with membrane movement without loss of adhesion. Lap Sealants may be used to seal mechanical terminations, the cut edges of VersiGard Reinforced EPDM membranes and for sealing at splice intersections. Lap Sealant must be applied and feathered on all seam edges by the end of the working day.

**Coverage Rate:** 22' per tube using a  $\frac{5}{16}$ " bead.

**Packaging:** 25 tubes/carton

**Product Number:**

302189 – Black

309819 – White

**Shelf Life:** 12 months



### UNIVERSAL SINGLE-PLY SEALANT



A 100%-solids, solvent-free, one-part, polyether sealant that provides a weathertight seal to a variety of building substrates. Universal Single-Ply Sealant can be used in lieu of lap sealant for VersiWeld, VersiFlex and VersiGard white adhered and mechanically attached roofing systems.

**Coverage Rate:** 25' per tube or 600' per carton using a  $\frac{1}{4}$ " bead.

**Packaging:** 24 Tubes/carton

**Product Number:** 310131

**Shelf Life:** 12 months unopened container (@ <math>90^{\circ}\text{F}</math>)



### BLACK ONE-PART POURABLE SEALER



A single-component, moisture-curing, elastomeric polyether sealant that is compatible with Versico's EPDM membranes. It is designed to provide a flexible, durable and long-lasting seal around hard-to-flash penetrations. The sealant's consistency allows for quick pocket filling without mixing. Unused sealant is usable for up to 30 days if pouch is resealed with original cap. Black one-part pourable sealer is black in color.

**Coverage Rate:** 122 cubic inches of volume per  $\frac{1}{2}$ -gal pouch.

**Packaging:** (4)  $\frac{1}{2}$ -gal pouches per bucket

**Product Number:** 307647

**Shelf Life:** 12 months unopened container



### WATER CUT-OFF MASTIC



A one-component, low-viscosity, self-wetting, butyl-blend mastic designed to be used in conjunction with roofing and waterproofing systems. It is primarily used as a sealing agent between various membranes and substrates for compression type terminations.

**Coverage Rate:** 10' per tube, using a  $\frac{7}{16}$ " bead.

**Packaging:** 25 Tubes/carton

**Product Number:** 302202

**Shelf Life:** 12 months unopened container



### LIQUISEAL® LIQUID FLASHING



A two-component, polyurethane-based system that creates a cold-applied liquid flashing that is compatible with all Versico EPDM, TPO, PVC and KEE HP membranes. LIQUISEAL Liquid Flashing is ideal for flashing oddly shaped penetrations and tying together dissimilar roofing systems without building a knee wall or impeding drainage.

**Coverage Rate:** 13.6 square feet per gallon.

**Packaging:** (8)  $\frac{1}{2}$  gal/carton, 1-gallon pails

**Product Number:**

330891 – White  $\frac{1}{2}$  gallon

330892 – White 1-gallon

333301 – Gray  $\frac{1}{2}$  gallon

333302 – Gray 1-gallon

**Shelf Life:** 12 months unopened container



### CUT EDGE SEALANT



#### TPO CUT EDGE SEALANT

A clear, free-flowing polymeric material designed for sealing cut edges (exposed fabric) of VersiWeld TPO membrane.

**Coverage Rate:** 225'-275' per 16-oz. bottle when applied with 1/8" bead.

**Packaging:** (8) 16-oz. bottles/carton

**Product Number:** 303436

**Low-VOC - Product Number:** 327530

**Shelf Life:** 12 months

#### PVC CUT EDGE SEALANT

*Also Available (Not shown)*

PVC Cut Edge Sealant is used for sealing cut edges (exposed fabric) of VersiFlex PVC Membrane. Cut Edge Sealant is clear in color.

**Coverage Rate:** 225'-275' per bottle when applied with 1/8" bead.

**Packaging:** (12) 16-oz. bottles/carton

**Product Number:** 307754

**Shelf Life:** 12 months



### WHITE ONE-PART POURABLE SEALER



A single-component, moisture-curing, elastomeric polyether sealant that is compatible with Versico's white EPDM, TPO and PVC membranes. It is designed to provide a flexible, durable and long-lasting seal around hard-to-flash penetrations. The sealant's consistency allows for quick pocket filling without mixing. Unused sealant is usable for up to 30 days if pouch is resealed with original cap. White one-part pourable sealer is white in color.

**Coverage Rate:** 122 cubic inches of volume per 1/2-gal pouch.

**Packaging:** (4) 1/2-gal pouches per bucket

**Product Number:** 307603

**Shelf Life:** 18 months

### SPLICE ADHESIVE



Designed for splicing cured-to-cured EPDM membranes and non-QA flashings, this high-strength, solvent-based contact cement allows quick bonding of flashing, sheeting, and cured rubber seams. Formulated for application with a 1/2" medium nap roller and/or a 1/2"-thick paint brush, the versatile tack time allows large areas to be coated and adhered at one time.

**Coverage Rate:** 100 square feet per gallon.

**Packaging:** (6) 1-gal cans – Black and White

**Product Number:** 309550 – Black; 302147 – White

**Shelf Life:** 12 months – Black; 9 months – White

### VAPAIR SEAL™ 725TR



A 40-mil composite consisting of 35 mils of self-adhering rubberized asphalt laminated to a 5-mil woven polypropylene film. Used as an air and vapor barrier/temporary roof, one-piece poly release liner prevents the material from bonding to itself in the roll and is easily removed for installation. May be used as a temporary roof for up to 120 days. Common substrates include concrete, DensDeck®, and SECUROCK®.

**Coverage Rate:** 325 FT<sup>2</sup>/roll  
**Packaging:** 39" x 100'  
**Thickness:** 40 mils  
**Weight:** 67 lbs/roll  
**Product Number:** 330170  
**Shelf Life:** 12 months unopened container

### VAPAIR SEAL MD



A 15-mil composite reinforced aluminum-coated poly with a self-adhering SBS. Used as an air and vapor barrier direct to metal decking. Meets UL 1256 and FM 4470 internal fire ratings. Reinforced aluminum-coated poly stands up to the toughest roof traffic. This product's self-healing characteristics allow for fastening penetration while maintaining IECC air leakage requirements of 0.04 cfm.

**Coverage Rate:** 458 FT<sup>2</sup>/roll  
**Packaging:** 42½" x 131'  
**Thickness:** 15 mils  
**Weight:** 28 lbs/roll  
**Product Number:** 321931  
**Shelf Life:** 12 months unopened container

### SUREMB 90 BASE PLY



A 90-mil SBS-modified asphalt base sheet. Can be used in multi-ply roofing systems as an air and vapor barrier, or as a temporary roof for up to 60 days. This product is fiberglass-reinforced and meets or exceeds requirements of ASTM 6363 Type 1. When used as an air and vapor barrier, suitable substrates include concrete (primer required), DensDeck Prime, and SECUROCK.

**Coverage Rate:** 161 FT<sup>2</sup>/roll (excluding lap)  
**Packaging:** 39 3/8" x 49' 1"  
**Thickness:** 90 mils  
**Weight:** 96 lbs/roll  
**Product Number:** 307253  
**Shelf Life:** 12 months

### SUREMB 90TG BASE PLY AND SUREMB 120TG BASE PLY



Premium smooth-surfaced SBS torch-applied membranes reinforced with fiberglass mat. Can be used as a base ply in multi-ply systems, as an air and vapor barrier, or as a temporary roof for up to 60 days. Excellent for low temperature applications when use of peel-and-stick membranes may not be possible. Ideal substrates include primed concrete and primed SECUROCK.

**SureMB 90TG Base**  
**Coverage Rate:** 161 FT<sup>2</sup>/roll (excluding lap)  
**Packaging:** 39 3/8" x 49' 1"  
**Thickness:** 90 mils  
**Weight:** 95 lbs/roll  
**Product Number:** 323887  
**Shelf Life:** 12 months unopened container

**SureMB 120TG Base Ply**  
**Coverage Rate:** 107 FT<sup>2</sup>/roll (excluding lap)  
**Packaging:** 39 3/8" x 32' 9"  
**Thickness:** 120 mils  
**Weight:** 85 lbs/roll  
**Product Number:** 323313  
**Shelf Life:** 12 months unopened container

## Insulation




### VERSICORE MP-H® POLYISO

A rigid roof insulation panel composed of a closed-cell polyisocyanurate foam core bonded to glass-reinforced felt (GRF) facers. UL and FM approved for direct applications over steel decks, polyiso provides the highest R-value per inch of any commercially available insulation product.

**Sizes:** 4' x 4' and 4' x 8'

**Thickness:** ½" to 4½"

**Compressive Strength:** 20 and 25psi

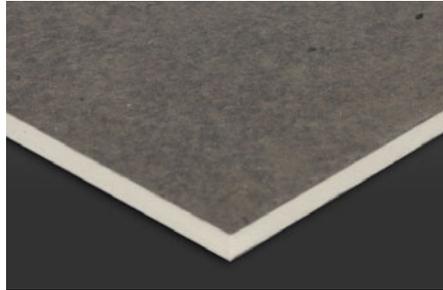

### VERSICORE HD

A rigid-roof insulation cover board composed of a high-density closed-cell polyisocyanurate foam core bonded to **glass-reinforced felt (GRF) facers**. VersiCore HD is specifically designed for use as a cover board in mechanically-attached systems only.

**Sizes:** 4' x 4' and 4' x 8'

**Thickness:** ½"

**Compressive Strength:** 80psi



### SECURSHIELD®

A rigid roof insulation panel composed of a closed cell polyisocyanurate foam core bonded to high performance coated glass facers (CGF). The premium facer provides improved fire ratings, enhanced wind uplift performance and superior moisture and mildew resistance. 1" board achieves UL Class A Fire Rating over combustible decks. Ideal for use in adhered membrane systems.

**Sizes:** 4' x 4' and 4' x 8'

**Thickness:** ½" to 4½"

**Compressive Strength:** 20 and 25psi



### SECURSHIELD HD

A rigid roof insulation panel composed of a ½" high-density, closed-cell polyisocyanurate foam core bonded to a premium performance coated glass facer (CGF). Specifically designed for use as a cover board. Provides 5 times the R-value at 5 times less weight than traditional gypsum cover boards. ½" achieves UL Class A Fire Rating over combustible decks.

**Sizes:** 4' x 4' and 4' x 8'

**Thickness:** ½"

**Compressive Strength:** 20psi (SecurShield base layer) and 109psi max (SecurShield HD cover board)



### SECURSHIELD HD PLUS

A rigid roof insulation panel composed of a ½" high-density, closed-cell polyisocyanurate foam core bonded to a premium-performance coated glass facer (CGF). Specifically designed for use as a cover board. Provides an **FM 1-90 wind uplift rating with only 8 fasteners** per 4' x 8' board.

**Sizes:** 4' x 4' and 4' x 8'

**Thickness:** ½"

**Compressive Strength:** 109psi max



### SECURSHIELD HD COMPOSITE

A unique composite insulation panel comprised of a ½" high-density polyiso cover board bonded during the manufacturing process to SecurShield rigid polyiso roof insulation. Eliminates the need for a separate cover board, reduces the inter-ply adhesives and saves labor on the roof.

**Sizes:** 4' x 4' and 4' x 8'

**Thickness:** 1½" to 4½"

**Compressive Strength:** 20psi (SecurShield base layer) and 109psi max (SecurShield HD cover board)



### DURAFACER® POLYISO

A rigid roof insulation composite panel comprised of a closed-cell polyisocyanurate foam core bonded to a glass-reinforced felt (GRF) facer on one side and either 7/16" oriented strand board (OSB) on the other.

**Sizes:** 4' x 8'

**Thickness:** 1 1/2" to 4 1/2"



VERSICORE MP-H NH



SECURSHIELD NH


### VERSICORE MP-H NH AND SECURSHIELD NH

A Living Building Challenge (LBC) "Red List Free" rigid roof insulation panel composed of a closed-cell polyisocyanurate foam core bonded to the appropriate facer. VersiCore MP-H NH and SecurShield NH contains zero halogenated flame retardants.

**Sizes:** 4' x 4' and 4' x 8'

**Thicknesses:** 1/2" to 4 1/2"

**Compressive Strength:** 20 and 25psi

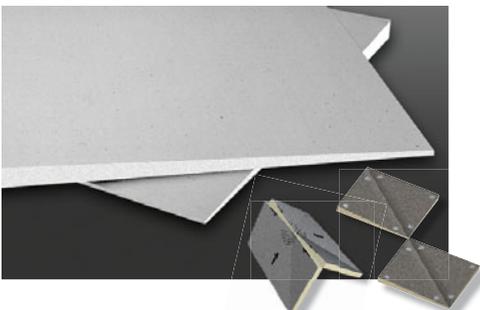

### TAPERED POLYISO

A sloped, rigid roof insulation panel composed of a closed-cell polyisocyanurate foam core bonded to a coated glass or fiber-reinforced facer. Designed to promote **positive drainage** and **prevent ponding water**.


Hinged Target Sumps and Pre-Cut Hips and Valleys ship ready to install, **require no field cuts** and **save valuable time on the roof**. Multiple thicknesses and slopes available to accommodate specific job conditions with no waste, thus reducing disposal fees.

**Sizes:** 4' x 4' and 4' x 8'  
4' x 4' (Hip/Valley) and 8' x 8' (Sump)

**Thickness:** 1/2" to 4 1/2" (multiple layers utilized for increased thicknesses)

**Compressive Strength:** 20 and 25psi

## Insulation

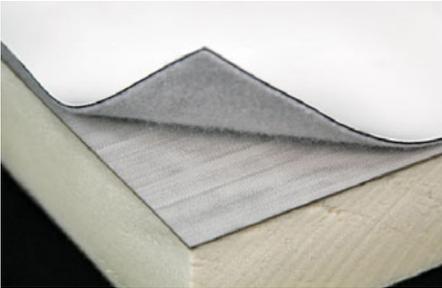

### RAPIDLOCK POLYISO

VersiCore MP-H® RL™ and SecurShield RL are standard density polyisocyanurate roof boards specially designed to act as the hook in the RapidLock (hook and loop) system.

VersiCore MP-H RL utilizes a GRF facer and SecurShield RL a CGF facer.

SecurShield HD RL is a high-density rigid roof polyisocyanurate board bonded to coated-glass (CGF) facers.

#### VersiCore MP-H RL and SecurShield RL

**Sizes:** 4' x 8'

**Thickness:** 2.0" and 2.6"


**Compressive Strength:** 20psi

#### SecurShield HD RL

**Sizes:** 4' x 8'

**Thickness:** 0.5"

**Compressive Strength:** 109psi max

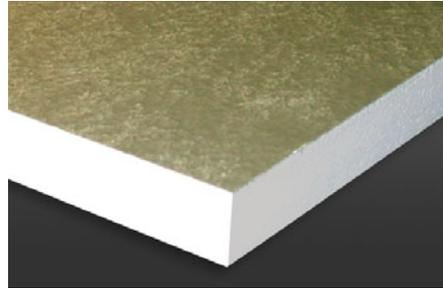


### INSULFOAM® SP EPS

Premium coated glass-faced insulation approved for mechanically-attached or self-adhering systems without a slip sheet. Warranted long-term R-value providing up to R30 in a single layer.

**Sizes:** 4' x 4' or 4' x 8'; custom sizes and taper panels available

**Thickness:** ¼" to 6"

**Densities:** 1.25 to 3 lb/ft³

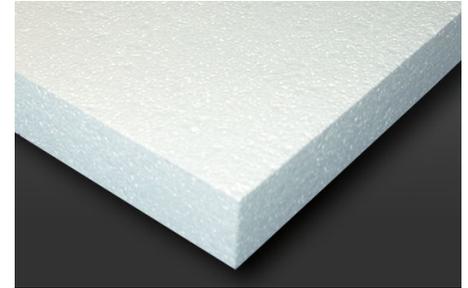

### INSULFOAM EPS

Engineered rigid insulation consisting of high-performance, water-resistant expanded polystyrene (EPS). Meets ASTM C578 requirements, includes extensive UL and FM ratings and can be applied direct to the metal deck.

**Sizes:** 4' x 4' or 4' x 8'; custom sizes available

**Thickness:** ¼" to 40" per panel

**Densities:** 1 to 3 lb/ft³



### INSULFOAM EPS (40/60 PSI)

High compressive-strength engineered EPS. Ideal for plaza decks, garden or vegetative roofs, IRMA and high traffic areas that require additional strength and water-resistance. Available in thicknesses up to 40" in a single layer.

**Sizes:** 4' x 4' or 4' x 8'; custom sizes and taper panels available

**Thickness:** ¼" to 40" per panel

**Compressive Strength:** 40 and 60psi



### DECKVENT EPS INSULATION


Versico's high-performance DeckVent insulation is composed of lightweight, closed-cell expanded polystyrene meeting the requirements of ASTM C578 Type IX. DeckVent has excellent dimensional stability, compressive strength, and water-resistant properties. DeckVent is designed to be mechanically attached directly to concrete decks. **The use of DeckVent in conjunction with one-way and two-way relief vents allows the installation of the roof system to begin upon structural cure of concrete.**

**Sizes:** 4' x 4'

**Thickness:** 2"

**Compression Strength:** 25psi

## Insulation

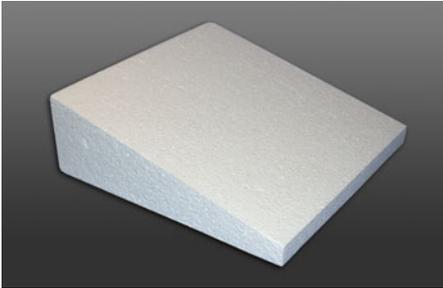


### INSULFOAM EPS TAPER

Tapered engineered EPS insulation available in virtually any slope, with panels up to 40" in a single layer. Can be combined with Versico polyiso for tapered hybrid roof systems. Custom saddles and crickets also available.

**Slope:** Virtually any slope

**Thickness:** ½" to 40"

**Densities:** 1 to 3 lb/ft<sup>3</sup>

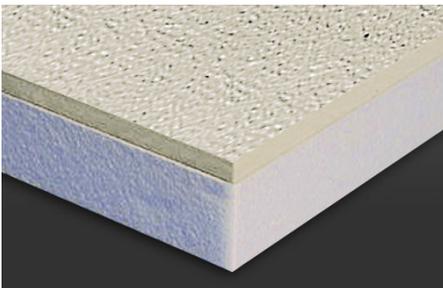


### SECURSHIELD HD EPS COMPOSITE

A premium composite insulation consisting of a closed-cell, lightweight and resilient expanded polystyrene (EPS) bonded to high-density polyisocyanurate cover board. The polyisocyanurate cover board is manufactured at ½" thickness and 100psi compressive strength. The EPS is available in compressive strengths from 10 – 60psi and densities from 1 – 3 pcf.

**Sizes:** 4' x 4' and 4' x 8'

**Thickness:** 1 ½" to 6"

\* Manufactured in flat and tapered panels.

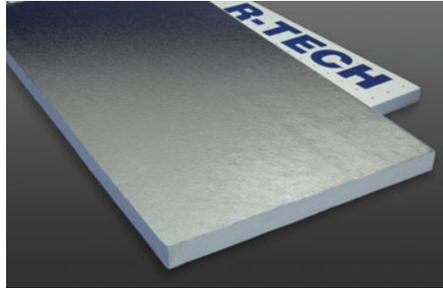


### R-TECH

A high-performance rigid insulation consisting of a superior closed-cell, lightweight and resilient expanded polystyrene (EPS) with advanced polymeric laminate facers. R-Tech comes with a factory-adhered white facer and a metallic-reflective facer. R-Tech has excellent dimensional stability, compressive strength and water-resistant properties. R-Tech is an ENERGY STAR-qualified insulation and can contribute towards LEED certification credits.

**Sizes:** 4' x 4' and 4' x 8'

**Thickness:** ¾" to 1"

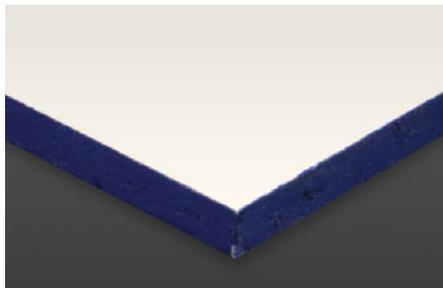

### DURASTORM VSH™ COVERBOARD

Engineered composite building material made from a proprietary blend of plastic and cellulose fiber sourced from post-industrial and post-consumer waste streams. DuraStorm VSH is a durable, extremely moisture and mold resistant building material with a core that does not disintegrate or delaminate in the presence of water.

**Sizes:** 4' x 8'

**Thickness:** ½"

**Compressive Strength:** 3,990psi



### R-TECH® FANFOLD RECOVER BOARD

A high-performance, rigid insulation consisting of a superior closed-cell, lightweight and resilient expanded polystyrene (EPS) with advanced polymeric laminate facers. R-Tech is available with factory-adhered metallic-reflective facers and white facers. R-Tech Fanfold Recover Board is an ENERGY STAR®-qualified insulation and can contribute toward LEED® certification credits.

**Sizes:** 2 square bundles (2' x 4' folded/4' x 50' unfolded)

**Thickness:** ¼", ⅜", ½", ¾"



# VERSIGARD®

## EPDM Packaging Guide

As Versico's EPDM product offering has increased, it has become necessary to re-categorize its products into color families for easier identification in the warehouse. Standard sheeting will be packaged in full-color bags while sheeting with QAT™ will come in white bags with color-matched ink.



- 1 Unroll direction
- 2 Length and width indicated on core
- 3 Versico logo prominently displayed on large label for easy brand identification
- 4 Enlarged gauge and product identification
- 5 Code Approvals
- 6 Clean or Dusted designation
- 7 2-Pack designation (when applicable)
- 8 QAT Unrolling Instructions
- 9 Color strip on QAT bags for product identification





# VERSIGARD®

## EPDM Packaging Guide

### VERSIGARD® NON-REINFORCED MEMBRANES (GREEN FAMILY)



Standard Sheeting



Sheeting with QAT

### VERSIGARD REINFORCED MEMBRANES (GRAY FAMILY)



Standard Sheeting




Sheeting with QAT

### VERSIGARD WHITE MEMBRANES (TEAL FAMILY)

Standard Sheeting



Sheeting with QAT



### HIGH-DEMAND MEMBRANES (YELLOW FAMILY)



60-mil 10x100 and 10x50 pre-cleaned membranes will remain in pre-branded yellow bags.



## Quick Reference Guide

EPDM Systems	BALLASTED	FULLY ADHERED	MECHANICALLY ATTACHED REINFORCED	MECHANICALLY ATTACHED NON-REINFORCED	COVERAGE RATE OR AVAILABLE SIZES	PACKAGING
<b>MEMBRANES</b>						
VersiGard Black Non-Reinforced 45-, 60- & 90-mil EPDM						4.5-50' x 50-200' per roll
VersiGard White Non-Reinforced 60- & 90-mil, White EPDM						10'-30' x 50-100' per roll
VersiGard Reinforced 45-, 60- & 75-mil EPDM						4.5-10' x 50-100' per roll
VersiGard QA Non-Reinforced 60-mil						10' x 100' per roll
VersiGard w/Quick-Applied Tape (QAT)					Various sizes and thicknesses	Single packs or 2 packs
VersiFleece RL EPDM					115-mil	10' x 50', 10' x 100'
<b>ADHESIVES &amp; SEALANTS</b>						
CAV-GRIP 3V Low-VOC Adhesive/Primer					1,000-2,000 sq. ft. per cylinder	#40 Aerosol Cylinder #85 Cylinder
Low-VOC Primer					250 sq. ft per gallon (dusty membrane) Up to 700 sq. ft per gallon (no-dust membrane)	(6) 1 gallon cans per case
V-150 Primer					250 sq. ft per gallon (dusty membrane) Up to 450 sq. ft per gallon (no-dust membrane)	(6) 1 gallon cans per case
G200SA Yellow Substrate Adhesive					60 sq. ft per gallon	5 gallon pail
Solvent-Free EPDM Bonding Adhesive					100 sq. ft per gallon	5 gallon pail
Aqua Base 120 Bonding Adhesive					100-120 sq. ft. per gallon	5 gallon pail
Low-VOC Bonding Adhesive					60 sq. ft. per gallon	5 gallon pail
G300LS Black Lap Sealant					22' per tube	25 tubes per carton
White Lap Sealant					22' per tube	25 tubes per carton
One-Part Pourable Sealer (Black/White)					122 cubic inches per ½ gallon	(4) ½ gallon pouches per bucket
Weathered Membrane Cleaner					400 sq. ft. per gallon	1 gallon or 5 gallon pail
Water Cut-Off Mastic					10' per tube	25 tubes per carton
Quick-Applied Seam Tape					3' x 100', 6' x 100'	4 rolls per carton, 2 rolls per carton
<b>FLASHINGS</b>						
Quick-Applied Uncured EPDM Flashing (Black/White)					6" x 100', 9" & 12" x 50'	6" - 2 rolls per carton 9" & 12" - 1 roll per carton
Quick-Applied Cured Coverstrip (Black/White)					6" x 100', 9" x 100' & 12" x 50'	6" - 2 rolls per carton 9" & 12" - 1 roll per carton
Quick-Applied Overlayment Strip (Black)					6" x 100', 9" x 10" & 12" x 50'	6" - 2 rolls per carton 9" & 12" - 1 roll per carton
Quick-Applied RTS (Black)					6" x 100', 9" x 100'	6" - 2 rolls per carton 9" - 1 roll per carton
Quick-Applied Pipe Seals (Black/White)					1"-3" & 1"-6" pipes	10 per carton
Quick-Applied Pourable Sealer Pockets (Black/White)					4", 6" & 8"	12 per carton
Quick-Applied Inside/Outside Corners (Black/White)					7" x 9"	20 per carton
Quick-Applied Curb Flashing (Black/White)					20" x 50", with 5" tape	1 roll per carton



## Quick Reference Guide

EPDM Systems	BALLASTED	FULLY ADHERED	MECHANICALLY ATTACHED REINFORCED	MECHANICALLY ATTACHED NON-REINFORCED	COVERAGE RATE OR AVAILABLE SIZES	PACKAGING
<b>FLASHINGS</b>						
Fully Quick Applied Curb Flashing (Black)					20' x 50'	1 roll per carton
Quick-Applied T-Joint Covers (Black)					6" and 12"	20 per carton
Pipe Supports					Mini: ½" - 1½", Small: ¾" - 2", Large: 2½" - 5"	Mini & small - 20 per carton Large - 10 per carton
<b>ACCESSORIES</b>						
Quick-Applied Molded Walkway Pads (Black/White)					30' x 30'	50/pallet
Interlocking Rubber Pavers (Black, TerraCotta)					24" x 24"	Single Paver
HP Protective Mat					15' x 300'	Per roll
EPDM Expansion Joint-Edge (Deck to Wall)					25 ft.	25 LF per carton
EPDM Expansion Joint-Field					25 ft.	25 LF per carton
<b>FASTENERS AND PLATES</b>						
HPV Fasteners (EPDM Membrane or Insulation)					1¼" to 15"	250-1000 per package
HPV ASAP w/2" Polymer Plate (Membrane Attachment)					2" to 12"	200-500 per package
2" Metal Membrane Plate (Flat Bottom - Membrane)					2" diameter	1000 per package
Polymer Seam Plate					2" diameter	1000 per package
2" Metal Seam Fastening Plate					2" diameter	1000 per package
3" Plastic Insulation Plate					27/8" diameter	1000 per package
MP 14-10 (Structural Concrete)					1¼" to 14"	250-1000 per package
Insultite Insulation Fasteners (Insulation)					1 5/8" to 8"	1000 per package
Insultite ASAP Insulation Fasteners					2¼" to 8"	250 per package
3" Steel Insulation Plate					3" in diameter	1000 per package
GypTec Fastener (Gypsum, Cementitious, Wood Fiber)					2½" to 10"	250-500 per package
GypTec Plate (Gypsum, Cementitious, Wood Fiber)					2" - membrane 3" - insulation	1000 per package
Accutrack Fastener/Plate Kit (Insulation)					1 5/8" to 6"	1000 per package
Purlin Fastener (Membrane Attachment, Metal Retrofit Systems)					3" to 7¼"	500 per package
CD-10 (Concrete)					2" to 12"	250-500 per package
Life Deck Fastener (Insulation Attachment)					2 5/8" to 12"	125-500 per package
Metal Fastening Bar 6" O.C.					1" x 10' Bar	50 pieces
Polymer Fastening Strip 3" O.C.					1" x 250' Coil	250 LF
1 ¼" Term Bar Nail In					1 ¼"	1000 per package
Termination Bar (Aluminum)					1" wide x .050 thick x 10' long	500 LF

\*Or more depending on climate conditions



# VERSICO

## Quick Reference Guide

<b>TPO Systems</b>	<b>MECHANICALLY ATTACHED</b>	<b>FULLY ADHERED</b>	<b>VERSIFLEECE AC</b>	<b>COVERAGE RATE OR AVAILABLE SIZES</b>	<b>PACKAGING</b>
<b>TPO Membranes</b>					
VersiWeld 45-, 60- & 80-mil	☑	☑	☑		4' to 12' x 100' roll
VersiWeld APEEL 60-mil	☑	☑			4', 6', 8', 10', and 20' x 100' roll
VersiWeld QA TPO 60-mil	☑	☑			10' x 50' and 10' x 100'
VersiFleece APEEL 115- & 135-mil	☑	☑			6' and 12' x 100' roll
VersiFleece TPO	☑	☑	☑	100-mil, 115-mil, 135-mil	6' x 75', 6' x 100', 12' x 50', 12' x 75', 12' x 100'
VersiFleece AC TPO	☑	☑	☑	120-mil, 135-mil, 155-mil	6' x 75', 12' x 75'
VersiFleece RL TPO		☑		115-mil	10' x 50', 10' x 100'
<b>TPO Adhesives and Sealants</b>					
VersiWeld Bonding Adhesive		☑		60 sq. ft. per gallon	5 gallon pail
CAV-GRIP 3V Low-VOC Adhesive/Primer	☑	☑		1,000-2,000 sq. ft. per cylinder	40# aerosol cylinder 85# aerosol cylinder
Aqua Base 120 Bonding Adhesive		☑		100-120 sq. ft. per gallon	5 gallon pail
Flexible DASH Adhesive				See TDB	Multiple
Low-VOC Bonding Adhesive		☑		60 sq. ft. per gallon	5 gallon pail
Weathered Membrane Cleaner	☑	☑	☑	400 sq. ft. per gallon	1 gallon or 5 gallon pail
Cold Applied Adhesive			☑	50-67 sq. ft. per gallon	5 gallon pail
White One-Part Sealant	☑	☑	☑	122 cubic inches per ½ gallon	(4) ½ gallon pouches/bucket
TPO Primer (Standard and Low-VOC)	☑	☑	☑	200 to 250 sq. ft. per gallon	(6) 1 gallon cans/carton
TPO Clear Cut Edge Sealant	☑	☑	☑	225 linear ft. per bottle	6 bottles per carton
Universal Single-Ply Sealant	☑	☑	☑	25 ft. per tube (½" bead)	24 tubes, 10.1 fl. oz. each
<b>TPO Flashings</b>					
TPO Molded Pipe Seals	☑	☑	☑	¾" to 8"	8 per carton
TPO PS Coverstrip 6" x 100'	☑	☑	☑	6" x 100'	2 rolls per carton
TPO Non-Reinforced Flashing	☑	☑	☑	12" x 50' and 24" x 50'	1 per carton
TPO Split Pipe Seals	☑	☑	☑	1" to 6"	8 per box
TPO Square Tubing Wraps	☑	☑	☑	3", 4", 5", 6"	8 per box
TPO Inside/Outside Corner	☑	☑	☑		12 per bag
TPO Inside Corners	☑	☑	☑		12 per bag
TPO Outside Corners	☑	☑	☑		12 per bag
TPO Universal Corners	☑	☑	☑		20 per box
TPO Curb Wrap Corners	☑	☑	☑	7", 13", 19"	12 per box
TPO Molded Sealant Pockets	☑	☑	☑	7.5" to 11" x 6" oval	5 per carton
TPO Sealant Pocket Extensions	☑	☑	☑	14" overall length; 10" installed length	10 per carton
6" TPO PS RUSS	☑	☑		6" x 100'	2 rolls
10" TPO PS RUSS	☑	☑		10" x 100'	1 roll
TPO T-Joint Covers	☑	☑	☑	4½" diameter	100 per box
<b>Accessories</b>					
TPO Walkway Rolls (White, Gray & Tan)	☑	☑	☑	34" x 50' roll	Per roll
TPO Coated Metal 4' x 10'	☑	☑	☑	4' x 10'	10 or 25 per skid
<b>TPO or PVC Fasteners</b>					
Insultite Insulation Fasteners	☑	☑	☑	1½" to 8"	1000 per package
3" Steel Insulation Plate	☑	☑	☑	3" in diameter	1000 per package
HPV Fasteners (Insulation)		☑		1¼" to 15"	250-1000 per package
HPVX Fasteners (Membrane)	☑			2" to 22"	250-1000 per package



# VERSICO

## Quick Reference Guide

<b>TPO Systems</b>	<b>MECHANICALLY ATTACHED</b>	<b>FULLY ADHERED</b>	<b>VERSIFLEECE AC</b>	<b>COVERAGE RATE OR AVAILABLE SIZES</b>	<b>PACKAGING</b>
<b>TPO or PVC Fasteners</b>					
HPVX ASAP Fasteners (Membrane)				2" to 16"	150-250 per package
HPVX Plates				2 3/8"	1000 per package
HPV-XL Fasteners (Steel Deck Only)				2" to 12"	250-500 per bucket
TPO RhinoBond Plates				3" diameter	500 per package
PVC RhinoBond Plates				3" diameter	500 per package
<b>Miscellaneous Accessories</b>					
Termination Bar (Aluminum)				1" wide x .050 thick x 10' long	500 LF
1 1/4" Term Bar Nail In				1 1/4"	1000 per package

<b>PVC Systems</b>	<b>MECHANICALLY ATTACHED</b>	<b>FULLY ADHERED</b>	<b>COVERAGE RATE OR AVAILABLE SIZES</b>	<b>PACKAGING</b>
<b>PVC Membranes</b>				
VersiFlex 50, 60 & 80-mil				See TDB
VersiFlex KEE HP 50, 60 & 80-mil				See TDB
VersiFleece PVC			115-mil and 135-mil	10' x 75', 10' x 100'
VersiFleece KEE HP PVC			105-mil, 115-mil, 135-mil	10' x 75', 10' x 100'
VersiFleece RL PVC				See TDB
<b>PVC Flashings</b>				
PVC Pressure-Sensitive Cover Strip			35-mil, 6" x 100'	2 rolls per carton
PVC Flashing			12", 24" x 50'	1 per carton
PVC T-Joint Covers			4 1/2" diameter	100 per box
PVC Inside Corners				12 per bag
PVC Outside Corners				12 per bag
PVC Universal Corners				20 per box
PVC Molded Sealant Pockets			7 1/2" x 6"	5 per carton
PVC Molded Pipe Seals			3/4" to 8" diameter pipe	8 per box
PVC Split Pipe Seals			1" to 6" diameter pipe	8 per box
PVC Square Tubing Wraps			3", 4", 6"	8 per box
<b>PVC Adhesives and Sealants</b>				
Low-VOC PVC Bonding Adhesive			60 sq. ft. per gallon	5 gallon pail
HydroBond Bonding Adhesive			100-200 sq. ft. per gallon	5 gallon pail
Flexible DASH Adhesive			See TDB	Multiple
White One-Part Sealant			122 cubic inches per 1/2 gallon	(4) 1/2 gallon pouches/bucket
PVC Cut-Edge Sealant			225' to 275' (1/8" bead)	(12) 16 oz. bottles/carton
PVC Membrane Cleaner			400 sq. ft. per gallon	5 gallon pail
<b>PVC Coated Metal &amp; Walkway</b>				
PVC Coated Metal			4' x 10" sheet	10 sheet/pallet
PVC Walkway Rolls (Gray)			36" x 60' (91.4 cm x 18.3 m)	Per roll
<b>PVC Preformed Flashings</b>				
PVC Molded Pipe Flashings (White)			1" to 6"	8 per carton
PVC Split Pipe Seals (White)			1" to 6"	8 per carton
PVC Split Square Tubing Wraps (White)			3" to 6"	8 per carton
<b>PVC Fasteners - See Above</b>				



# VERSICO

ROOFING SYSTEMS

A SINGLE SOURCE FOR SINGLE-PLY ROOFING

**Versico**, PO Box 1289, Carlisle, PA 17013  
Tel: **800.992.7663** Fax: 717.960.4036 Web: **www.versico.com**

©2020 Versico. Printed in U.S.A.  
REPRINT REQUEST CODE: 602352 – "Product Reference Guide" – 02.12.20

Disclaimer: All product information in this guide is subject to change without notice. While Versico makes every effort to provide the most accurate, up-to-date information, occasionally, one or more items in our guide may be mislabeled. For the most up-to-date version visit [www.versico.com](http://www.versico.com). Versico, VersiGard, VersiWeld, VersiFlex, VersiFleece, DuraFaceR, and the Versico logo are trademarks of Versico. SecurShield, CAV-GRIP, LIQUISEAL, and RL are trademarks of Carlisle Construction Materials, LLC. isoweld is a registered trademark of SFS Intec, Inc. ENERGY STAR is a registered trademark of the US government. LEED is a registered trademark of the U.S. Green Building Council.